

OPzV Series

6 OPzV 420 2V420Ah

Sacred Sun OPzV series are valve regulated lead-acid cells which use a combination of tubular positive plate woven gauntlets, pasted negative plate design and gel electrolyte using advanced filling techniques in production which assure superior service life and excellent battery reliability. The battery has excellent cyclic performance and charge acceptance ability. It can be used in high-low temperature environment and poor grid condition.



Benefits

- Very long life according to EUROBAT Classification
- 1500+ cycles at 80% DOD
- High rate discharge performance
- High gas recombination efficiency
- Maximum charge efficiency
- GEL state electrolyte prevents leakage and layering
- Low resistance PVC or PF micro-porous separator ensures low self-discharge rate
- Optional racking offers easy installation (vertical or horizontal)


Applications

- Telecommunications
- Energy storage system
- Hybrid power system
- Power system
- UPS

Standards

- IEC 60896-21/22
- IEC 61427
- DIN 43539-T5
- DIN 40742
- EUROBAT guide

Drawing

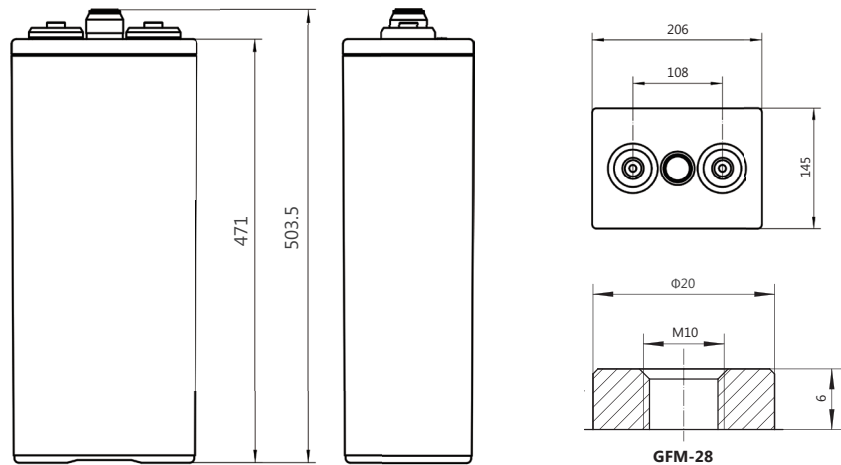

Specifications


| | | | | |
|--------------------------------------|--|--------------------|-----------------------|-------------------|
| Battery Model | 6 OPzV 420 | | | |
| Design Life (years, 25°C) | 20 | | | |
| Capacity (Ah, 25°C) | 10HR (42A, 1.80V) | 5HR (71.4A, 1.80V) | 3HR (105A, 1.80V) | 1HR (210A, 1.80V) |
| | 420 | 357 | 315 | 210 |
| Dimensions (mm) | Length | Width | Height | Total Height |
| | 145 | 206 | 471 | 503.5 |
| Approx. Weight (kg) | 32.4 | | | |
| Reference Internal Resistance (mΩ) | 0.55 (fully charged @ 25°C) | | | |
| Maximum Discharge Current (A/3 Sec.) | 2438 | | | |
| Self-Discharge (25°C) | ≤ 3% per month | | | |
| Charge Voltage (V/cell, 25°C) | Cycle use | | Float use | |
| | 2.35 (-3.5mV/°C/cell), max charge current: 84A | | 2.25 (-3.5mV/°C/cell) | |
| Short Circuit Current (A) | 3658 | | | |

Discharge Data

| Constant Current Discharge Data (25°C, A) | | | | | | | | | | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-------|-------|------|------|------|------|------|-------|-------|------|------|------|
| End Voltage (V/cell) | min | | | | | h | | | | | | | | | | | | |
| | 5 | 10 | 15 | 20 | 30 | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 20 | 24 | 48 | 100 | 120 | 240 |
| 1.65 | 584 | 544 | 496 | 431 | 348 | 242 | 159.8 | 123.6 | 85.1 | 72.1 | 54.6 | 44.0 | 24.0 | 20.64 | 11.34 | 5.87 | 4.92 | 2.52 |
| 1.70 | 540 | 508 | 461 | 409 | 335 | 231 | 155.4 | 117.0 | 80.5 | 68.0 | 53.5 | 43.4 | 23.6 | 20.09 | 11.19 | 5.82 | 4.88 | 2.47 |
| 1.75 | 508 | 485 | 445 | 386 | 313 | 221 | 152.4 | 110.9 | 76.3 | 65.5 | 51.4 | 42.7 | 23.3 | 19.70 | 11.05 | 5.76 | 4.84 | 2.44 |
| 1.80 | 478 | 463 | 427 | 371 | 299 | 210 | 145.2 | 105.0 | 71.4 | 61.0 | 49.4 | 42.0 | 22.7 | 19.37 | 10.92 | 5.70 | 4.79 | 2.41 |
| 1.85 | 457 | 432 | 403 | 351 | 276 | 200 | 138 | 99.4 | 68.5 | 58.9 | 46.8 | 40.9 | 22.0 | 18.8 | 10.77 | 5.60 | 4.72 | 2.38 |


| Constant Power Discharge Data (25°C, W/cell) | | | | | | | | | | | | | | | | | | |
|--|------|------|-----|-----|-----|-------|-------|-------|-------|-------|-------|------|------|-------|-------|-------|------|------|
| End Voltage (V/cell) | min | | | | | h | | | | | | | | | | | | |
| | 5 | 10 | 15 | 20 | 30 | 1 | 2 | 3 | 5 | 6 | 8 | 10 | 20 | 24 | 48 | 100 | 120 | 240 |
| 1.65 | 1089 | 1003 | 867 | 806 | 700 | 494.0 | 340.0 | 254.0 | 169.0 | 143.0 | 115.0 | 92.7 | 49.3 | 41.40 | 22.80 | 11.82 | 9.90 | 5.10 |
| 1.70 | 986 | 910 | 803 | 738 | 660 | 479.0 | 321.0 | 242.0 | 163.0 | 138.0 | 111.0 | 91.6 | 48.3 | 40.32 | 22.32 | 11.70 | 9.79 | 4.98 |
| 1.75 | 902 | 839 | 748 | 679 | 600 | 469.0 | 300.0 | 232.0 | 159.0 | 134.0 | 108.0 | 88.2 | 47.6 | 39.60 | 22.14 | 11.58 | 9.68 | 4.90 |
| 1.80 | 833 | 760 | 674 | 617 | 539 | 428.0 | 286.0 | 219.0 | 148.0 | 125.0 | 104.0 | 86.1 | 46.7 | 38.64 | 21.84 | 11.40 | 9.60 | 4.82 |
| 1.85 | 767 | 664 | 605 | 549 | 479 | 389.0 | 267.0 | 201.0 | 135.0 | 119.0 | 96.5 | 81.3 | 45.2 | 37.68 | 21.54 | 11.22 | 9.50 | 4.76 |

Rack Layout

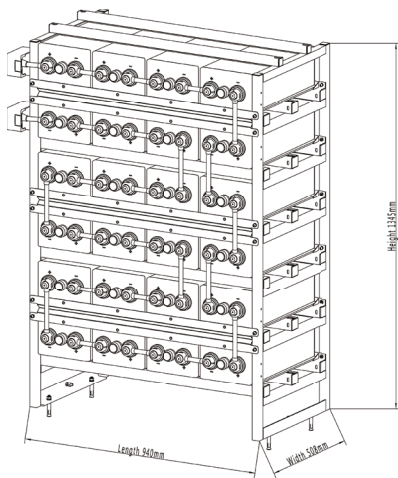


48V Standard Rack (Anti-seismic rack is optional)
 Rack material: powder-coated steel
 Height*width: 6*4/4*6 (optional)
 Ref. 6 OPzV 420 Rack (approx. weight: 885kg)


Performance Curve

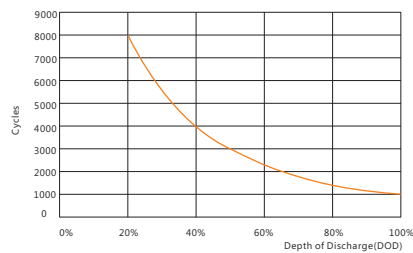


Cycle life vs. discharge depth

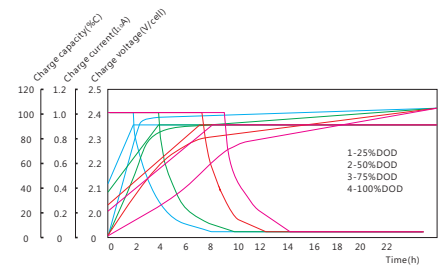

Charge vs. discharge depth

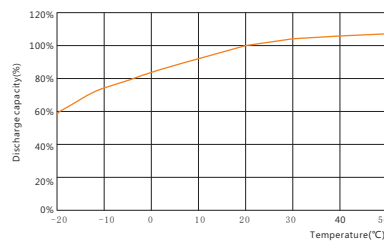

Capacity vs. temperature

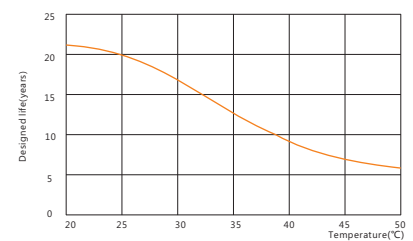

Design life vs. temperature

Sacred Sun Power Sources Co., Ltd.

No.1 Shengyang Road Qufu City, PRC
 sales@sacredsun.cn

Sacred Sun Asia Pacific

No. 15, Yishun Industrial Street 1,
 #01-17, WIN5, Singapore 768091
 sales.asia@sacredsun.cn

Sacred Sun Europe SPRL

Schoenstraat 96-9140 Temse, Belgium
 sales.eu@sacredsun.cn

Sacred Sun MEA FZE

S10122A1019 Jebel Ali, Dubai,
 United Arab Emirates
 sales.mea@sacredsun.cn

